


3-Port 1000BaseT Regeneration Tap (1000BT- AT+3C)

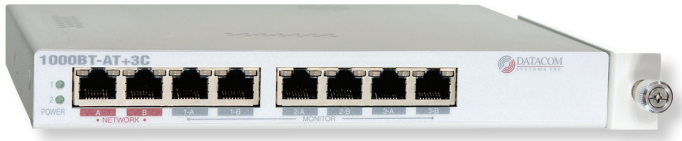

Optional 2-Unit Rack Mount

The Copper Gigabit Regeneration Tap provides easy 24 x 7 access to your Gigabit Ethernet segments. Three devices, such as intrusion detection systems, protocol analyzers, or probes can access the same segment at a single point, eliminating contention for network links. With redundant power supply and fault tolerant design, network performance and integrity will not be affected by power loss.

- Permanent In-Line access to Ethernet links - eliminates the need for network connectors to be disconnected and connected each time a segment needs to be analyzed or monitored
- Connect three devices (IDS, Probes, Analyzers, etc.) to the same link
- Multiple access points solves link contention issues
- Ideal for Security and Monitoring applications
- View traffic on both sides of full duplex links
- Redundant power supply insures seamless monitoring even if the main power source is unavailable

TECHNICAL SPECIFICATIONS

Network Ports

- One (1) 1000MB Tap (RJ45) Network Connection
- Three (3) 1000MB (RJ45) Tap/Monitoring Connection

Power Requirements

- Dual Redundant Power Supplies
- 5 VDC, 200mA

Physical Dimensions (H x W x D)

- 1.1 x 8 x 7 in.
- 2.8 x 20.3 x 17.8 cm.

Weight

- 2.0 lbs.
- .91 Kgs.

Environmental

- Operating Temperature: 0° to 40° C
- Storage Temperature: 30° to 65° C
- Humidity: Less than 95° C non-condensing

Warranty

- 2-year limited warranty

Ordering Information

Product	Description
1000BT-AT+3C	3-Port 1000BaseT Regeneration Tap
RMC-2	2 Unit Rack Mount

ACCESS YOUR NETWORK™