SINGLEstream™ 1210

1G Link Aggregation Tap
SS-1210SX-BT-S

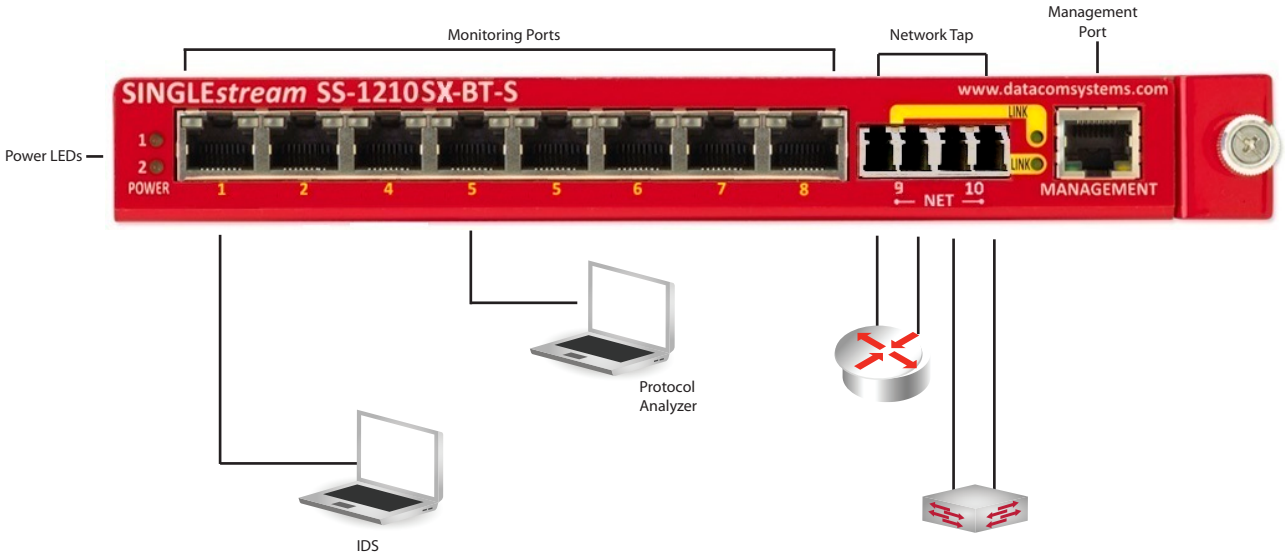

Technical Specifications

PORTS

Network: ne ( ) Multimode i e et o
Monitoring: ig t ( ) n to n ort
Management: M ll le
Serial (rear):

Split Ratio

50/50, 70/30 and 80/20
Additional split ratios Bvailable

Power Requirements

Two (2) External AC Adapters (included)
Input: 100-240 VAC, 50-60Hz, 0.8A

Certifications

CE, RoHS, CAN ICES-3 (B)/NMB-3(B)

PHYSICAL DIMENSIONS (H x W x D)

1.10 x 8.00 x 7.00 in (2.79 x 20.32 x 17.78 cm)

WEIGHT

1.6 lbs (0.7 kgs)

ENVIRONMENT

0QFSBUJOH 5FNQFSBUVSF 32º to 104ºF (0° to 40°C)
4UPSBHF 5FNQFSBUVSF -22º to 149ºF (-30° to 65°C)
)VNJEJUX 5 to 90% non-condensing

WARRANTY

One (1) Year Hardware Warranty included
Advanced Replacement-Next Day, 3rd Business Day options available.

XXXXTT

XNXPEXIPPTNXOSPXXXEX
XNXPEXIPPTNXOSPXXXEX

ORDER INFORMATION

Product	Description
SS-1210SX-BT-S	SINGLEstream™1000 Link Aggregation Tap with 8 - 0/100/1000 (RJ45) Any-to-Any Monitoring Ports with SSH, SNMP (specify 50 or 62.5 micron and spllit ratio)

Optional Equipment

RMC-2	2-TAP 1U Rack Mount Chassis
RMC-12-2	12-TAP 6U Rack Mount Chassis
RPS-12-5-AC (or -DC)	12-TAP Dual Redundant Rack Mountable Power Supply Unit (specify AC or DC)

Find out more. Visit
www.datacomsystems.com

DATACOM SYSTEMS INC

© Datacom Systems Inc. 201