




SINGLEstream™ 1210

1G Link Aggregation Tap SS-1210SX-BT-S

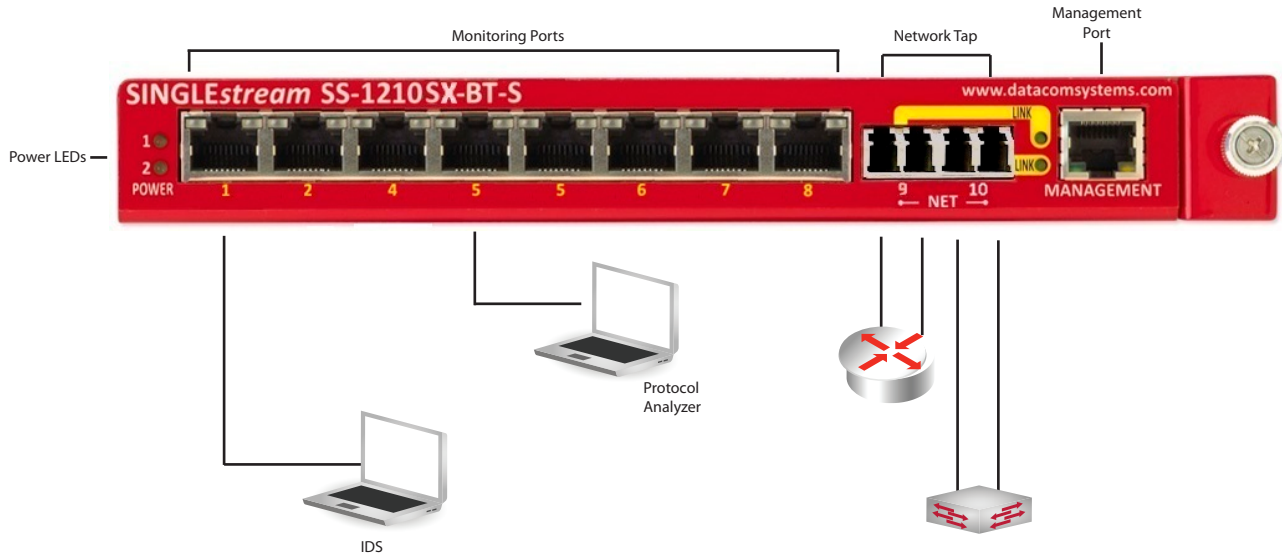

Technical Specifications

PORTS

Network: 8 () Multimode fiber port
Monitoring: 8 () network port
Management: 1 () Management port
Serial (rear): 1 () Serial port

Split Ratio

50/50, 70/30 and 80/20
 Additional split ratios Available

Power Requirements

Two (2) External AC Adapters (included)
 Input: 100-240 VAC, 50-60Hz, 0.8A

Certifications

CE, RoHS, CAN ICES-3 (B)/NMB-3(B)

PHYSICAL DIMENSIONS (H x W x D)

1.10 x 8.00 x 7.00 in (2.79 x 20.32 x 17.78 cm)

WEIGHT

1.6 lbs (0.7 kgs)

ENVIRONMENT

Operating Temperature: 32° to 104°F (0° to 40°C)
Storage Temperature: -22° to 149°F (-30° to 65°C)
Humidity: 5 to 90% non-condensing

WARRANTY

One (1) Year Hardware Warranty included
 Advanced Replacement-Next Day, 3rd Business Day options available.

PROTOCOLS

IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3az, IEEE 802.3av, IEEE 802.3at, IEEE 802.3at-2, IEEE 802.3at-3, IEEE 802.3at-4, IEEE 802.3at-5, IEEE 802.3at-6, IEEE 802.3at-7, IEEE 802.3at-8, IEEE 802.3at-9, IEEE 802.3at-10, IEEE 802.3at-11, IEEE 802.3at-12, IEEE 802.3at-13, IEEE 802.3at-14, IEEE 802.3at-15, IEEE 802.3at-16, IEEE 802.3at-17, IEEE 802.3at-18, IEEE 802.3at-19, IEEE 802.3at-20, IEEE 802.3at-21, IEEE 802.3at-22, IEEE 802.3at-23, IEEE 802.3at-24, IEEE 802.3at-25, IEEE 802.3at-26, IEEE 802.3at-27, IEEE 802.3at-28, IEEE 802.3at-29, IEEE 802.3at-30, IEEE 802.3at-31, IEEE 802.3at-32, IEEE 802.3at-33, IEEE 802.3at-34, IEEE 802.3at-35, IEEE 802.3at-36, IEEE 802.3at-37, IEEE 802.3at-38, IEEE 802.3at-39, IEEE 802.3at-40, IEEE 802.3at-41, IEEE 802.3at-42, IEEE 802.3at-43, IEEE 802.3at-44, IEEE 802.3at-45, IEEE 802.3at-46, IEEE 802.3at-47, IEEE 802.3at-48, IEEE 802.3at-49, IEEE 802.3at-50, IEEE 802.3at-51, IEEE 802.3at-52, IEEE 802.3at-53, IEEE 802.3at-54, IEEE 802.3at-55, IEEE 802.3at-56, IEEE 802.3at-57, IEEE 802.3at-58, IEEE 802.3at-59, IEEE 802.3at-60, IEEE 802.3at-61, IEEE 802.3at-62, IEEE 802.3at-63, IEEE 802.3at-64, IEEE 802.3at-65, IEEE 802.3at-66, IEEE 802.3at-67, IEEE 802.3at-68, IEEE 802.3at-69, IEEE 802.3at-70, IEEE 802.3at-71, IEEE 802.3at-72, IEEE 802.3at-73, IEEE 802.3at-74, IEEE 802.3at-75, IEEE 802.3at-76, IEEE 802.3at-77, IEEE 802.3at-78, IEEE 802.3at-79, IEEE 802.3at-80, IEEE 802.3at-81, IEEE 802.3at-82, IEEE 802.3at-83, IEEE 802.3at-84, IEEE 802.3at-85, IEEE 802.3at-86, IEEE 802.3at-87, IEEE 802.3at-88, IEEE 802.3at-89, IEEE 802.3at-90, IEEE 802.3at-91, IEEE 802.3at-92, IEEE 802.3at-93, IEEE 802.3at-94, IEEE 802.3at-95, IEEE 802.3at-96, IEEE 802.3at-97, IEEE 802.3at-98, IEEE 802.3at-99, IEEE 802.3at-100

ORDER INFORMATION

Product

SS-1210SX-BT-S

Description

SINGLEstream™1000 Link Aggregation Tap with 8 - 0/100/1000 (RJ45) Any-to-Any Monitoring Ports with SSH, SNMP (specify 50 or 62.5 micron and split ratio)

Optional Equipment

RMC-2

2-TAP 1U Rack Mount Chassis

RMC-12-2

12-TAP 6U Rack Mount Chassis

RPS-12-5-AC (or -DC)

12-TAP Dual Redundant Rack Mountable Power Supply Unit (specify AC or DC)

Find out more. Visit www.datacomsystems.com

