


# SINGLEstream™ 2 Port SPAN Aggregation Tap (SS-200)

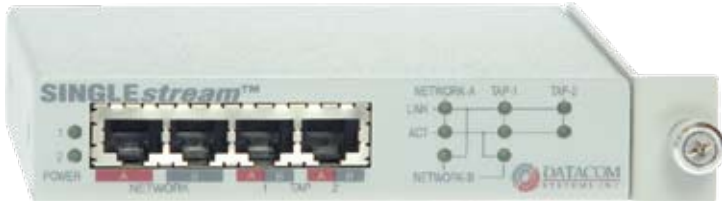

Optional 3-Unit Rack Mount

Datacom Systems' SINGLEstream™ 200 Series SPAN Aggregation Tap provides a secure solution for combining the network traffic from two SPAN ports into one single stream of data.

Connect up to two network monitoring devices to the SINGLEstream™ SPAN Aggregation Tap to monitor the combined full duplex traffic from both of the tapped SPAN Ports.

- Connect any compatible device (protocol analyzers, probes, intrusion detection system, more) for permanent In-Line monitoring of SPAN Ports - eliminates the need for network connectors to be disconnected and connected each time a segment needs to be monitored
- Multiple monitor ports allows extra devices to simultaneously monitor the same SPAN Port, providing extended security and analysis options, while eliminating contention for network access
- Redundant power supply insures seamless monitoring even if the main power source is unavailable

## TECHNICAL SPECIFICATIONS

### Ports

Two (2) 10/100 SPAN (RJ45) Network Connections  
Two (2) 10/100 (RJ45) Tap/Monitoring Connections

### Power Requirements

Two (2) (External AC Adapters Included)  
Input: 100 - 240 VAC, 50 - 60 Hz, 0.4A - 0.2A  
Output: 5 VDC, 2A

### Physical Dimensions (H x W x D)

1.07 x 5 x 5 in  
2.7 x 12.7 x 12.7 cm

### Weight

12 oz.  
.34 kgs.

### Environmental

Operating Temperature: 0° to 40° C  
Storage Temperature: -30° to 65° C  
Humidity: Less than 95° C Non-Condensing

### Warranty

2-Year Limited Warranty

### Ordering Information

Product	Port In:	Port Out:
SS-200	2 - 10/100	2 - 10/100
SS-201	2 - 100MB	2 - 100MB
SS-202**	2 - 10/100	2 - 10/100
SS-203**	2 - 100MB	2 - 100MB

\*\* Includes TCP Resets

Product	Description
RMC-3	3 Tap 1U Rack Mount Chassis
RMC-14	14 Tap 4U Rack Mount Chassis

## ACCESS YOUR NETWORK™

9 Adler Drive ■ East Syracuse, NY 13057 ■ T: (315) 463-9541 ■ F: (315) 463-9557 ■ DatacomSystems.com